



KIP 770




- 1 Media Roll Capacity
- Integrated Color Scanner with KIP patented RTT technology
- 600 x 1800 DPI (KIP IST) High Definition Printing technology
- Single footprint configuration
- Rated capacity–60000 m./Annum
- ISO-14000 compliant

KIP 770 Precision Design

The 770 delivers fast and accurate copies and prints using toner based imaging technology that produces UV stable prints. 100% toner efficient KIP High Definition Print Technology ensures rich blacks and smooth gradients. Superior print, copy and scan resolution captures fine details with remarkable tone clarity, keeping reproductions true.

- Premier Performance & Quality
- Smart Eco2 Design
- Color Touch Controls
- High Definition Print Technology
- 100% Toner Efficient- Zero Waste
- Energy Star Qualified System
- Recycled Paper Approved
- Components 97% Recyclable

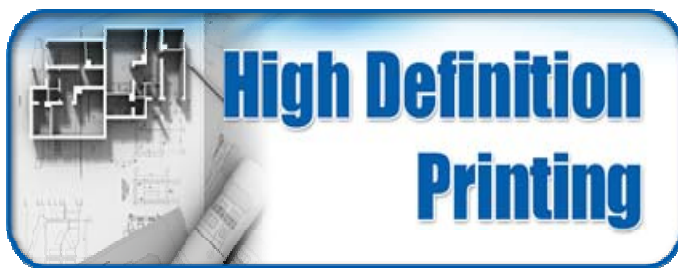

KIP 770 Paper Versatility

The automated paper loading of the KIP 770 accepts up to 1 - 500 foot rolls of media (2" and 3" cores) up to 36" wide.



KIP 700 RC Configuration

The KIP 700RC supports the full range of architectural and engineering print sizes with combined use of its front loading paper rolls and integrated paper cassette!

The KIP 700RC with integrated paper cassette extends the range of print sizes that can be produced by the



KIP 770 System Convenience

The compact design of the KIP 770 system provides front access to the touchscreen, auto rolls paper loading, system operation & copy/print delivery.

- Walk-Up Convenience
- Auto Media Loading
- Front Print Delivery
- On Screen System & Operator Guides

system without the need to change to a new rolls. The paper tray address the growing need in North America & Europe for Prints on colored paper/preprinted formats (not available in Roll Form) for enhanced appeal.

Printer Specification KIP 770

Technology	LED, with KIP HDP printing resulting in zero toner waste Organic Photoconductor
Resolution	600 x 1800 DPI (KIP IST) 300 Lines per inch
Productivity	
Print Speed	1.7 A0 per minute
First print time	18 seconds (A1 landscape)
Warm Up time	Instant from stand by < 4.0min from start up
Multiple media support	Print from USB
Media Source	1 roll with media bypass. Optional (Auto A2 Size Paper Cassette)
Toner	100% Toner Efficiency i.e. no Waste Toner (ISO 14001 compliant)
Media Types	Bond, Vellum. Translucent Bond, Film (compatible with recycled & colored bond)
Controller	
Ram	4 GB
Hard disc	500 GB
Printable formats	
Vector	HPGL/2 formats(.plt,.hpg,.gl2,.000,.rtl,.906,.907,etc.), HPGL formats, HP-RTL formats, Autodesk DWF (.dwf) Optional Formats Adobe Portable Document Format (.pdf)*, Postscript (.ps)*, Encapsulated Postscript (.eps)* and all other Industry Standard Format
Operator Interface	
Screen	long life touch screen for all operations
Preview	Real time image preview of all scanning and copying
Printer Weight	144kg excluding stand
Network	1 x RJ45 port, CAT5 100/1000mb
Atmospheric requirements- Temp. Humidity	10-32°C 15-85% non condensing
Energy consumption	Printing Mode 1,500W, Low power mode <30W , Energy star sleep mode 6.34W
Energy star type	EPA Energy Star
Scanner specification	
Type	CIS scanner with KIP RTT Technology
Resolution	600 DPI
Original feed	Face up
Original width	279-914mm
Original thickness	0.05-1.6mm
Colour mode	Monochrome – Binary, Greyscale – 4 bit / 8 bit, Colour 24 bit
Scanning speed	Monochrome 200 DPI = 180mm/sec, Monochrome 400 DPI = 90mm/sec , Monochrome 600 DPI = 60mm/sec, Colour 200 DPI = 60mm/sec, Colour 400 DPI = 30mm/sec, Colour 600 DPI = 20mm/sec
Mono Copying/Scanning	
Input selection	Line, Line/photo, Photo, Manual, despeckle, background removal
Output selection	Draft, Normal, Quality
Set copy	Up to 999 sets of 999 copies, Test set (concurrent print)
Edit set	Change order, Add image, Delete image, Zoom to view
View last job	Recall last job for editing of print parameters and reprinting
Stamping	Select from predetermined set of stamps
Zoom	5%-400% in 0.1% increments, Zoom to paper size, A size to A size, A size to b Size, Preset ratio
Recall Last Job	Recall edit parameters and resubmit
Standalone Function without PC or Network	Scan directly to USB Drive, Print Directly from USB Drive
RAT Proofing	Rodent Proof (Optional)
KIP 7.0 Print Management Software – KIP Web App – CLOUD PRINTING	

*All product features and specifications are subject to change without notice



**THE COLOR OF
KIP IS GREEN**

















REPROGRAPHICS INDIA

Regd. Office: BHEL Ancillary Estate, Ranipur, Haridwar, Uttarakhand
Ph: 01334-223074, 320329 Fax:01334-226889
Email: rihwr@reprographicsindia.co.in

Head Office: 604 Siddhartha Building, 96, Nehru Place, New Delhi-110019
Ph: 011-26424631/26424632 Fax: 011-46517048
Email: ridelhi@reprographicsindia.co.in
www.reprographicsindia.co.in

